
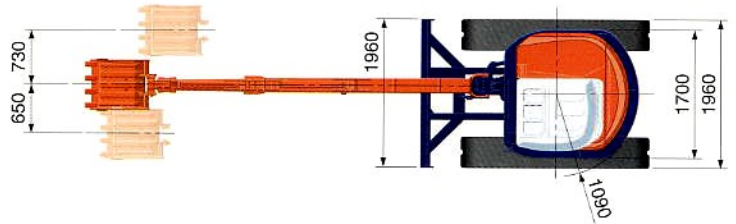


SPECIFICATIONS

*Rubber shoe type

| | | | | |
|--------------------------------|---------------------|---------------------------------------------------------------------|--------------|--|
| Machine weight | Cabin | kg | 5100 | |
| Bucket capacity, std. SAE/CECE | | m ³ | 0.17/0.15 | |
| Bucket width | With side teeth | mm | 680 | |
| | Without side teeth | mm | 650 | |
| Engine | Model | V2203-M-EBH-2-N | | |
| | Type | Water-cooled, diesel engine E-TVCS (Economical, ecological type) | | |
| | Output ISO9249 | PS/rpm | 40/2250 | |
| | | kW/rpm | 29.4/2250 | |
| | Number of cylinders | 4 | | |
| | Bore × Stroke | mm | 83 × 92.4 | |
| Displacement | cc | 2197 | | |
| Overall length | | mm | 5510 | |
| Overall height | Cabin | mm | 2540 | |
| Swivelling speed | | rpm | 9.3 | |
| Rubber shoe width | | mm | 400 | |
| Tumbler distance | | mm | 1990 | |
| Dozer size (width × height) | | mm | 1960 × 390 | |
| Hydraulic pumps | PI | Variable displacement pump | | |
| | Flow rate | ℓ/min | 121.5 | |
| | Hydraulic pressure | MPa (kgf/cm ²) | 23.5 (240) | |
| Max. digging force | Arm | kN (kgf) | 24.5 (2495) | |
| | Bucket | kN (kgf) | 39.9 (4075) | |
| Boom swing angle (left/right) | deg | 80/50 | | |
| Auxiliary circuit | Flow rate | ℓ/min | 75 | |
| | Hydraulic pressure | MPa (kgf/cm ²) | 23.5 (240) | |
| Hydraulic reservoir | | ℓ | 44 | |
| Fuel tank capacity | | ℓ | 70 | |
| Max. travelling speed | Low | km/h | 2.5 | |
| | High | km/h | 4.4 | |
| Ground contact pressure | Cabin | kPa (kgf/cm ²) | 28.8 (0.294) | |
| Ground clearance | | mm | 320 | |


WORKING RANGE

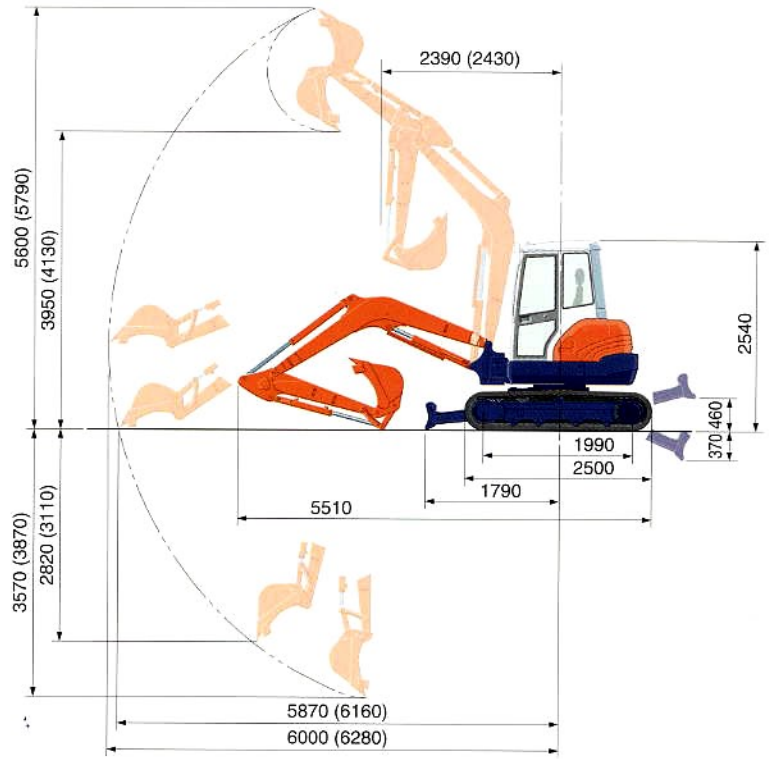

(): Long Arm
Unit: mm

LIFTING CAPACITY

| Lift Point Height | Lifting point radius (3m) | | | Lifting point radius (4m) | | |
|-------------------|---------------------------|-------------|-------------|---------------------------|-------------|------------|
| | Over-front | | Over-side | Over-front | | Over-side |
| | Blade Down | Blade UP | | Blade Down | Blade UP | |
| 3m | - | - | - | 9.8 (1.00) | 9.8 (1.00) | 9.5 (0.97) |
| 2m | 15.3 (1.56) | 15.3 (1.56) | 14.1 (1.44) | 11.4 (1.16) | 10.5 (1.07) | 9.1 (0.93) |
| 1m | 20.3 (2.07) | 15.4 (1.57) | 13.1 (1.33) | 13.3 (1.36) | 10.1 (1.03) | 8.7 (0.89) |
| 0m | 21.8 (2.23) | 14.9 (1.52) | 12.6 (1.29) | 14.4 (1.47) | 9.8 (1.00) | 8.5 (0.86) |

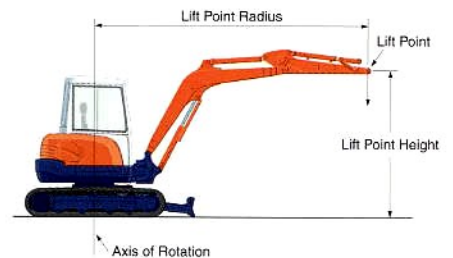

Please note:

* The lifting capacities are based on ISO 10567 and do not exceed 75% of the static tilt load of the machine or 87% of the hydraulic lifting capacity of the machine.

* The excavator bucket, hook, sling and other lifting accessories are not included on this table.

* Working ranges are with Kubota standard bucket, without quick coupler.

* Specifications are subject to change without notice for purpose of improvement.