
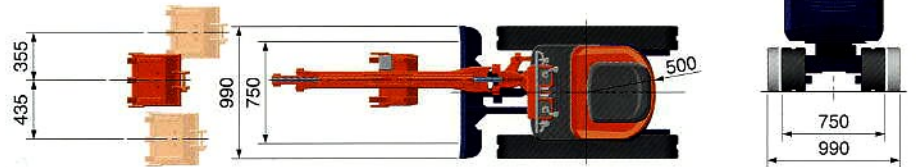


SPECIFICATIONS

*with rubber shoe type

Machine weight	Rubber crawler	kg	990
Bucket capacity, std. SAE/CECE		m ³	0.024/0.020
Bucket width	with side teeth	mm	398
	without side teeth	mm	380
Model		D722-BH-4	
Type		Water-cooled, diesel engine E-TVCS(Economical, ecological type)	
Engine	Output ISO90249	PS/rpm	10.2/2050
		kW/rpm	7.4/2050
	Number of cylinders	3	
	Bore x stroke	mm	67 x 68
	Displacement	cc	719
Overall length	mm	2980	
Overall height	mm	1420	
Swivelling speed	rpm	8.3	
Rubber shoe width	mm	180	
Tumbler distance	mm	1010	
Dozer size (width x height)	mm	750/990 x 200	
Hydraulic pumps	P1, P2		Gear pump
	Flow rate	ℓ/min	10.5+10.5
	Hydraulic pressure	MPa (kgf/cm ²)	17.6 (180)
	P3		Gear pump
	Flow rate	ℓ/min	3.1
Max. digging force	Arm	kN (kgf)	5.4 (550)
	Bucket	kN (kgf)	10.4 (1060)
Boom swing angle (left/right)	deg	55/55	
Auxiliary circuit	Flow rate	ℓ/min	21.0
	Hydraulic pressure	MPa (kgf/cm ²)	180
Hydraulic reservoir	ℓ	12.5	
Fuel tank capacity	ℓ	12.0	
Max. travelling speed	km/h	2.0	
Ground contact pressure	kPa (kgf/cm ²)	24.5 (0.25)	
Ground clearance	mm	140	


WORKING RANGE

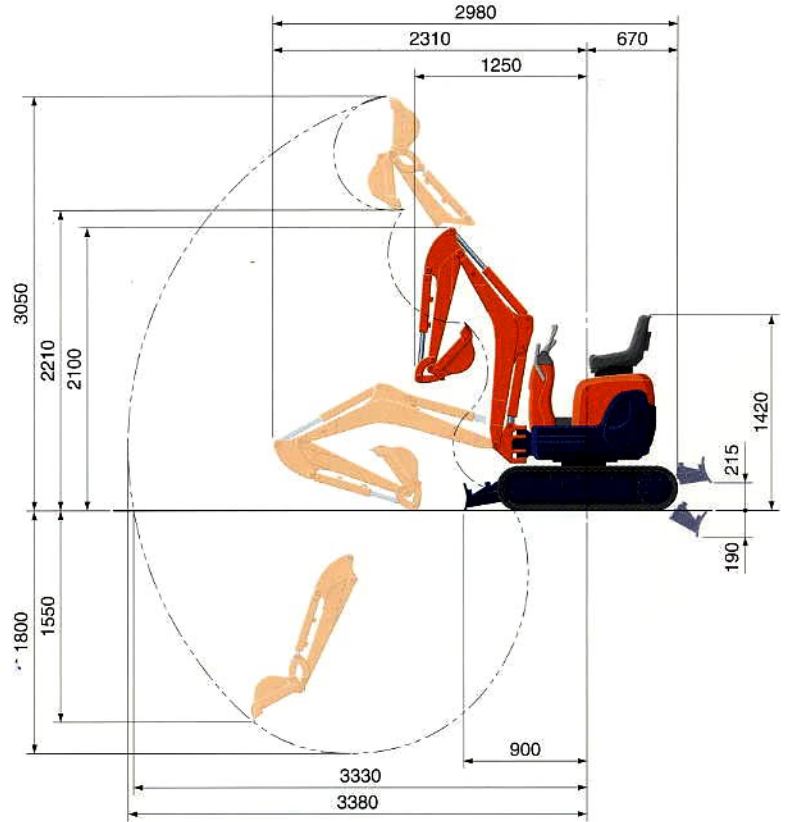

Unit: mm

LIFTING CAPACITY

Lift Point Height	kN (ton)					
	Lifting point radius (2.0m)			Lifting point radius (2.5m)		
	Over-front		Over-side	Over-front		Over-side
	Blade Down	Blade UP		Blade Down	Blade UP	
1.0 m	2.7 (0.28)	2.0 (0.21)	1.7 (0.18)	2.2 (0.22)	1.4 (0.15)	1.2 (0.13)
0.5 m	3.2 (0.32)	1.9 (0.20)	1.6 (0.17)	2.3 (0.24)	1.4 (0.14)	1.2 (0.12)

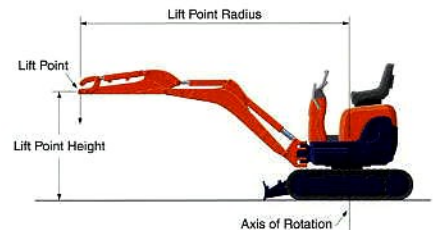

Please note:

* The lifting capacities are based on ISO 10567 and do not exceed 75% of the static tilt load of the machine or 87% of the hydraulic lifting capacity of the machine.

* The excavator bucket, hook, sling and other lifting accessories are not included on this table.

* Working ranges are with Kubota standard bucket, without quick coupler.

* Specifications are subject to change without notice for purpose of improvement.